

Product Technical Sheet

ENVi®

Thermostatic Electric Shower - Single Outlet Fixed Head Kit



Product Codes

ENVi® - 9.0kW - Silver	GEENVF92
ENVi® - 10.5kW - Silver	GEENVF12
ENVi® - 9.0kW - Black	GEENVF93
ENVi® - 10.5kW - Black	GEENVF13
ENVi® - 9.0kW - Copper	GEENVF97
ENVi® - 10.5kW - Copper	GEENVF17

Installation


- 15mm push-fit/compression
- Water connection from the Tri-Hub unit to the shower head outlet will allow for a distance of up to 3m
- 10m data cable supplied for Tri-Hub and Controller connection

Commissioning

- Simple 2 minute commissioning process

End User

- All new experience - Intuitive control with full colour digital display
- Get the look - Select from x3 premium finishes to match your bathroom style
- Luxurious rainfall - 220mm fixed shower head with adjustable ceiling arm (135mm-216mm)
- Personalisation - Create x6 individual time and temperature profiles
- Eco conscious - Shower a minute less and save water, save energy and save money
- User feedback - Water, Energy and Cost data on personal shower use
- Enhanced control - Tri-Protect® precise thermostatic temperature operation
- Phased shutdown - reducing unwanted scale build up
- Flexible installation - Tri-Hub can be located in the loft
- Replacement installation – discover the ENVi® retrofit plate accessory to cover marks from the previous electric shower installation. Visit tritonshowers.co.uk/envi for more information

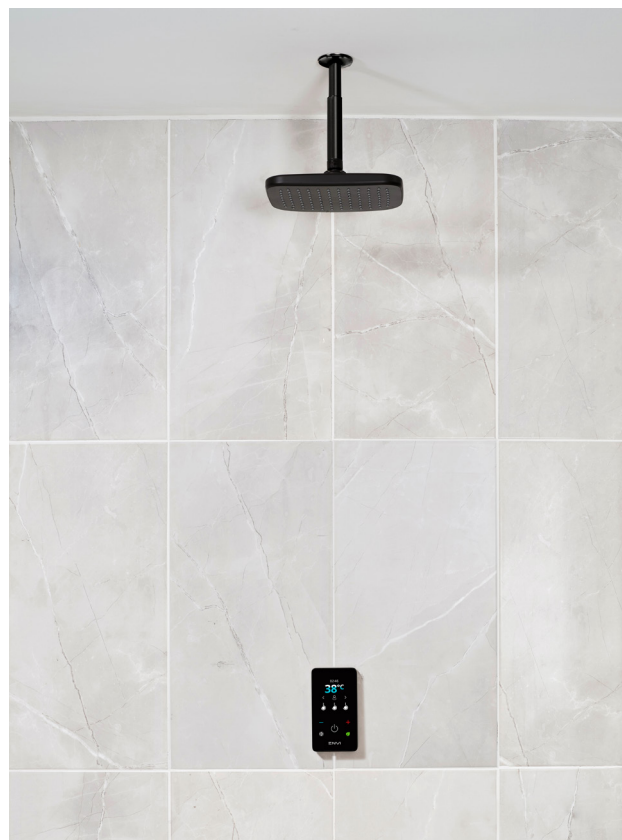

www.tritonshowers.co.uk/specifiers



For a cleaner conscience

Product Technical Sheet



Thermostatic Electric Shower - Single Outlet Fixed Head Kit



Shower

Temperature Control	Thermostatic (Tri-Protect®)
Power ratings	9.0kW & 10.5kW (240V)
Inlet Connection	15mm push-fit/compression
Water Entry Points	Bottom
Cable Entry Points	Left Hand Side
Outlet Connection	15mm push-fit/compression
Plumbing System Compatibility	Cold mains only
Minimum Running Pressure	0.7 Bar
Maximum Static Pressure	10 Bar
Installation Location	Loft
Approvals, Complies with	BEAB, CE, UKCA, BSI Kitemark
Guarantee	2 years

*Recommended minimum running pressure/flow for full performance 1 bar @8l/min

IMPORTANT MAINTENANCE NOTICE

Replacing specified Triton accessories for this ENVi® unit will aid optimum performance and maintain a valid guarantee

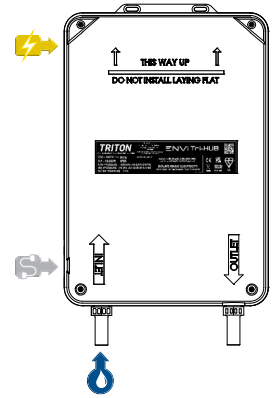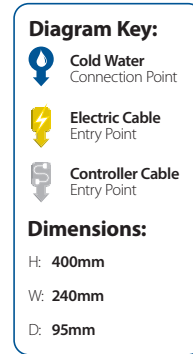

Copper Trim

Silver Trim

Black Trim



Tri-Hub Electric Shower Unit
Not available to purchase as a single unit



Single Outlet Fixed Head
All three finishes available

Contact our specification team

Call: 02476 324 776 | Email: specification@tritonshowers.co.uk | Web: www.tritonshowers.co.uk/specifiers