

## Care Sequential Thermostatic Concealed Shower Valve



**Code**  
SHWR212

### Description

Care sequential lever operated thermostatic concealed shower valve, that provides function without clinical appearance.

### Features


- Sequential lever operation for combined control of temperature and flow
- Long lever allowing for inclusive use
- Single piece thermal cartridge
- Factory set at 41°C to prevent scalding
- Anti-scald fail safe technology
- Concealed installation
- TMV3 approved
- WRAS approved
- 1 year guarantee

### Technical Specification:

Max operating pressure: 10.0 bar static  
Min operating pressure: 0.2 bar dynamic  
Max inlet temperature: 85°C  
Outlet connections: 15mm compression

**Finish:**  
Chrome

### Flow Rate (Bar – Ltr/Min):

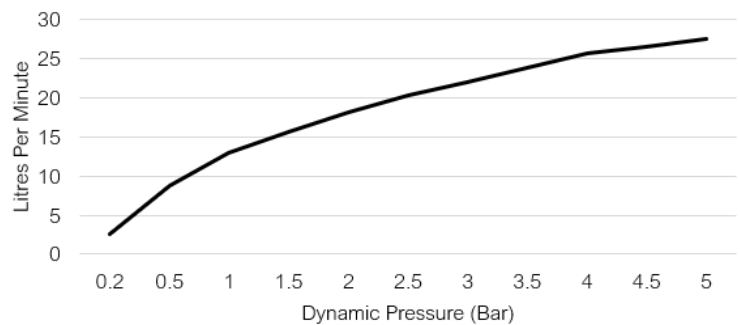

### Compatible Extras:

- SYRP6LF - 6 l/m flow regulator
- SYRP8LF - 8 l/m flow regulator
- SYRP10LF - 10 l/m flow regulator

